



Part No. : HI-I05A6YDAE-215

19/4245


§ Standard 5mm diameter package.

Characters

§ High intensity.

ITEM		MATERIALS
Resin(Mold)		Epoxy
Lens Color Code	C	Water Transparent
	T	Colored Transparent
	D	White Diffused
	E	Colored Diffused
Lead Frame	Ag Plating Iron Alloy	
Dice	InGaN	

Outline Dimensions

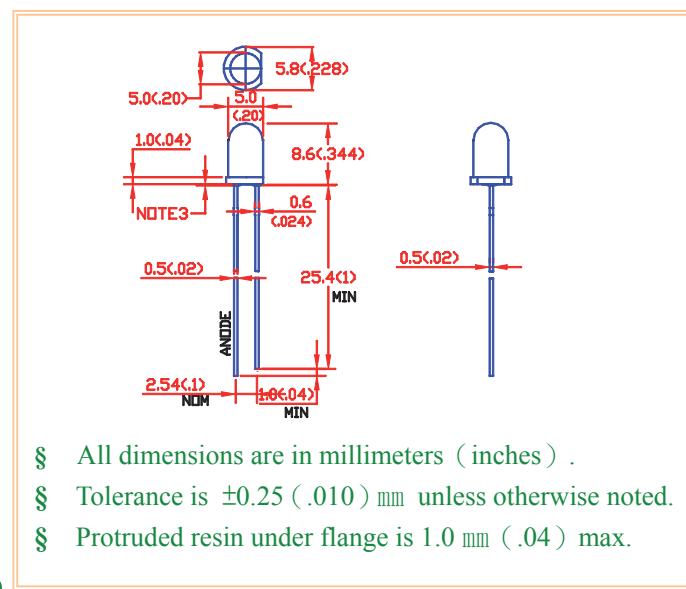


Absolute Maximum Ratings ($T_a=25^\circ C$)

Item	Symbol	Value	Unit
Power Dissipation	PD	100	mW
DC Forward Current	IF	30	mA
Pulsed Forward Current	IFP	100*	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-25 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	260for5seca Δ	°C

* Duty 1/10 Pulse Width 0.1ms Δ At the position of 4mm from the bottom of the package

Directive Characteristics ($T_a=25^\circ C$)

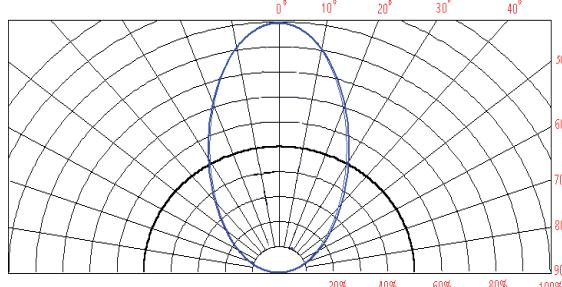

Electrical-Optical Characteristics ($T_a=25^\circ C$)

Parameter	Symbol	Value			Unit	Test condition
		Min.	Typ.	Max.		
Operating Voltage	V _f	1.8	---	2.4	V	I _f =20mA
Luminous intensity	I _v	80	110	200	mcad	I _f =20mA
Wavelength	x(& λ d)	585	590	595	(nm)	I _f =20mA
	y	---	---	---	---	I _f =20mA
Reverse Current	I _r	---	---	5	μ A	V _r =5V
Viewing angle	2θ _{1/2}	---	60	---	Deg	I _f =20mA
Spectral half bandwidth	△λ	---	25	---	nm	I _f =20mA