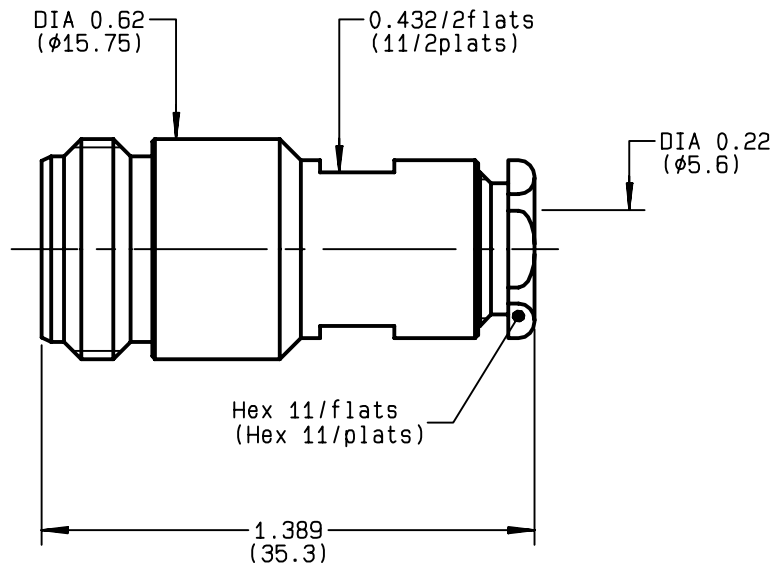


STRAIGHT JACK CLAMP TYPE
CABLE 5/50 S+D
R161.206.000
SERIES N


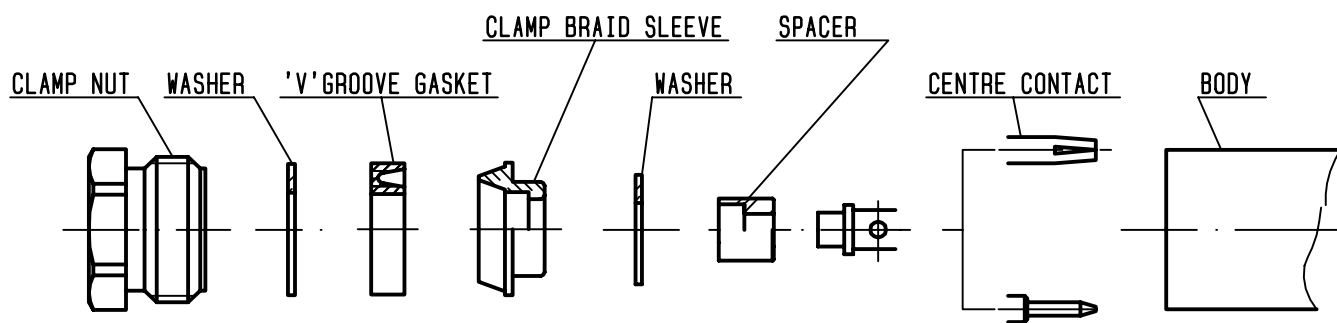
NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-11	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.20 +	$\times F(\text{GHz})\text{Maxi}$
RF INSERTION LOSS	0.048	$\sqrt{F}(\text{GHz}) \text{ dB Maxi}$
VOLTAGE RATING	850	$V_{\text{eff}} \text{ Maxi}$
DIELECTRIC WITHSTANDING VOLTAGE	1500	$V_{\text{eff}} \text{ Mini}$
INSULATION RESISTANCE	5000	$M \Omega \text{ Mini}$
HERMETIC SEAL	NA	$\text{Atm.cm}^3/\text{s}$
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	30.4	gr
SPECIFICATION		

CABLES : **KX 15**
KX 23
RG 141
RG 142
RG 142 FTX
RG 223
RG 400
RG 58

OTHERS CHARACTERISTICS

CABLE RETENTION	150	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	27	N Mini
Axial force - opposite end	27	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	NA	cm.N
Clamp nut	450	cm.N


CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET		-	
OTHERS PIECES	BRASS	BBR 2	



①

Strip the cable .

-
-
-
-




Stripping	a	b	c	d	e
inch	0.157	0.295	0	0	0.039
mm	4	7.5			1

②

Slide the clamp nut , the washer and the 'V'groove gasket onto the cable .
Slide clamp braid sleeve over braid .
Fold back braid and trim off surplus braid .
Trim back dielectric as shown .


-

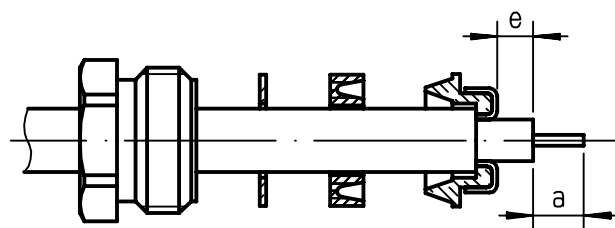

③

Slide the washer and the spacer onto the dielectric .
Solder the cable inner conductor into centre contact .

-
-

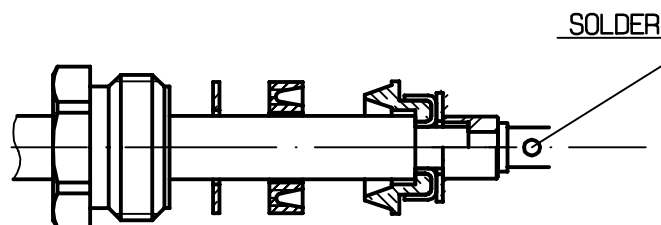

④

Screw sub-assembly into the connector body .
(recommended coupling torque 39.83 in.lb)

-
-

