



■ Appearance

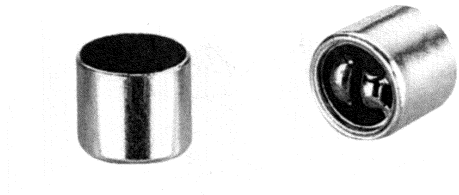


■ Sensitivity

$-46 \pm 3\text{dB}$

■ Typical Frequency Response Curve

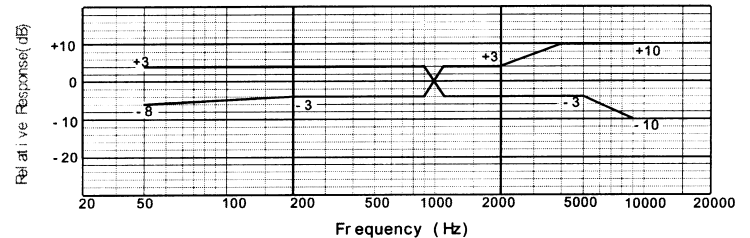

■ Dimensional Drawing

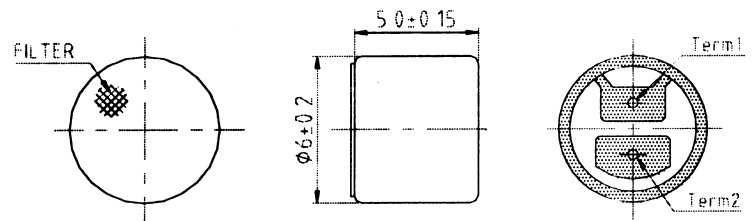


■ Std.Operating Conditions

$V_s = 3\text{V}$

$R_L = 2.2\text{k}\Omega$

■ Schematic Diagram

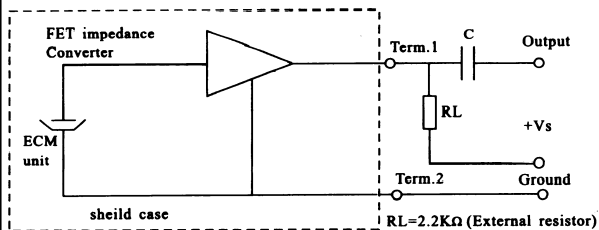

■ Specifications

Sensitivity: $-46 \pm 3\text{dB}$

Impedance: Less than $2.2\text{k}\Omega$

Directivity: Omnidirectional

Standard operation voltage: 3V

Current consumption: Max. 0.5mA

Sensitivity reduction: Within -3dB at 1.5V

S/N ratio: More than 58dB