
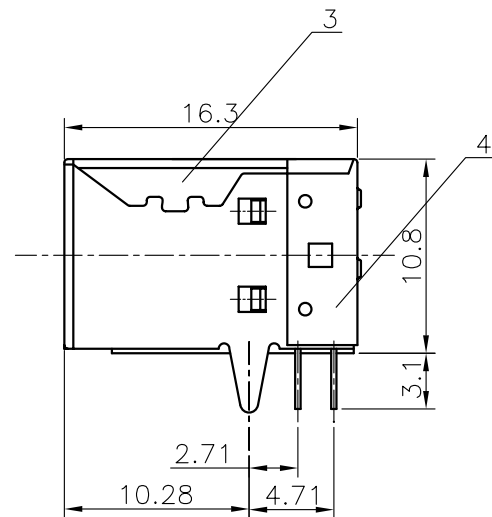


RECOMMEND PCB LAYOUT

TOLERANCE=±0.05

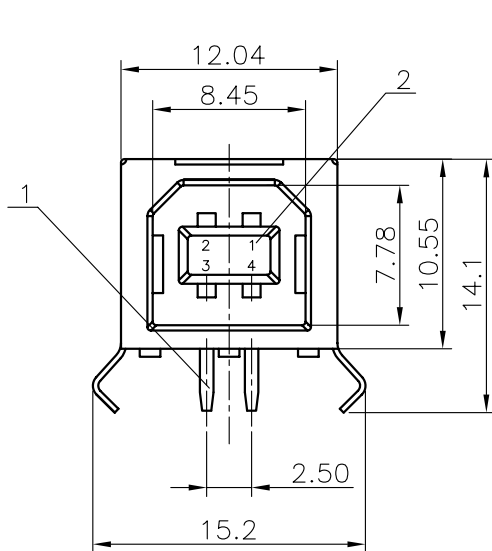

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE:30m Ω max.
- 1.1 INSULATION RESISTANCE:1000M Ω min.
- 1.2 CURRENT RATING:1.5A.
- 1.3 VOLTAGE RATING:30VDC.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.

2. MATERIALS:

- 2.0 HOUSING:PBT+30% GLASS FIBER(UL 94-0).
- 2.1 CONTACT:COPPER ALLOY
- 2.2 SHELL:COPPER ALLOY.