

SPECIFICATION

Rating: AC 125V 3A: AC 250V 1A

Contact R: 20MΩ Max

Insulation R: DC 500V 100MΩ Min

Dielectric strenght: AC 1000V 1 Minute

Electrical Life: 50,000 Cycles

Circuitry trait

A	ON-OFF	Open and close type	with lock
B	OFF-(ON)	Open type	momentary
C	ON-(OFF)	Close type	momentary

4/6474-4/6475

4/6471-4/6473


PBS-11A PUSH ON/PUSH OFF

PBS-11B PUSH ON

PBS-11C PUSH OFF

AC 125V 3A; AC 250V 1A



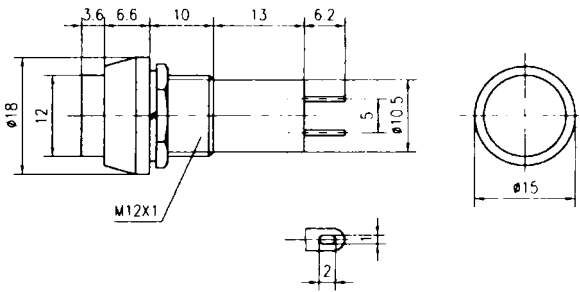

4/6484-4/6485

4/6481-4/6483

PBS-12A PUSH ON/PUSH OFF

PBS-12B PUSH ON

PBS-12C PUSH OFF

AC 125V 3A; AC 250V 1A



