



ISOLATORI CAT 1005

Caratteristiche tecniche

Supporti isolati a torretta doppia

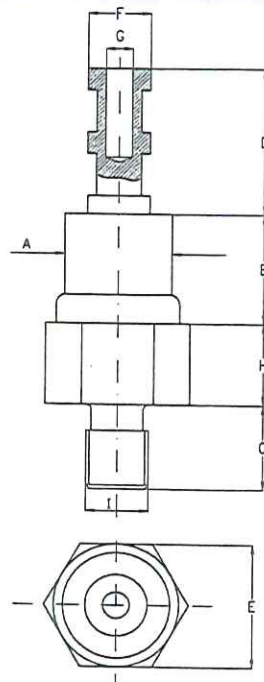

Materiale
Torretta OT - Stagnato.
Isolante teflon.
Esagono OT - NK

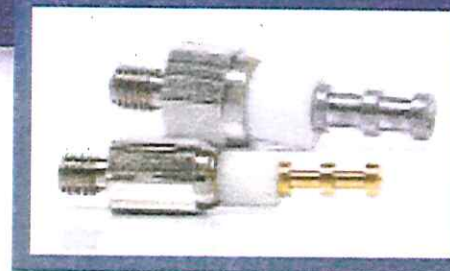

cat	A	B	C	D	E	F	G	H	I	foro di mont. ± 0.05
1005.1G	6	6	5	8.4	7	3.5	1.5	4.7	M-3.5	3.6
1005.2G	6	20.5	5	8.4	7	3.5	1.5	4.7	M-3.5	3.6
*1005.3	3	4.5	4	3.3	4	0.8	=	5	M-2.5	2.7
1005.4	3	4.5	4	5.5	4	2	=	5	M-2.5	2.7

La sigla G indica la torretta forata.

*1005.3-Torretta liscia