


Condensatori

Codice	Capac. (μF)	Tens. (Vcc)	Ø D x L	Passo ±0,5	Ø d
401009715	220	10	6,3 x 11	2,5	0,5
401009986		25	8 x 11,5	3,5	
401010127		35	10 x 12,5	5	0,6
401010266		50	10 x 16		
401010420		63	10 x 20		
401010575	330	100	16 x 25	7,5	0,8
401011208		16	8 x 11,5	3,5	
401011256		25	10 x 12,5	5	0,6
401011298		35	10 x 16		
401011346		50	10 x 20		
401011384	470	63	12,5 x 20		
401011441		100	16 x 25	7,5	0,8
401011820		10	8 x 11,5	3,5	
401011930		16	10 x 12,5	5	0,6
401012030		25	10 x 16		
401012121	1000	35	10 x 20		
401012217		50	12,5 x 20		
401012321		63	12,5 x 25		
401012387		100	16 x 31,5	7,5	0,8
401012838		16	10 x 20	5	0,6
401012958	2200	25	12,5 x 20		
401013116		35	12,5 x 25		
401013158		50	16 x 25		
401013263		63	16 x 31,5	7,5	0,8
401013725		16	12,5 x 25	5	0,6
401013881	3300	25	16 x 25		
401013991		35	16 x 31,5	7,5	0,8
401014566		10	12,5 x 25	5	0,6
401014655		16	16 x 25		
401014756		25	16 x 31,5	7,5	0,8
401015187	4700	10	16 x 25		
401015233		16	16 x 31,5		
401015503		6,3	31,5		

Condensatori elettrolitici microminiatura

Non-polarised electrolytic capacitors



Con reofori radiali.

Marca: ELNA

Tipo: R2B

Tolleranza: ± 20%


Temp. di lav.: -40° ÷ +85°C

Dimensioni (Ø D x L): 5 x 11mm

Codice	Capacità (μF)	V nom. (Vcc)
401000634	1	100
401001217	2,2	
401001998	3,3	
401002764	4,7	63

Condensatori elettrolitici microminiatura

Microminiature electrolytic capacitors

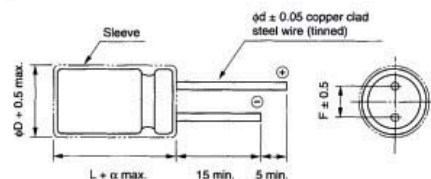

Marca: ELNA

Tipo: RC 3

Tolleranza: ± 20%

Temperatura di lavoro: -40° ÷ +85°C


Misura Ø d (mm): 0,45

Codice	Capacità (µF)	V nom. (Vcc)	Ø D (mm)	F (mm)
401000433	1	50	4	1,5
401000974	2,2			
401001891	3,3			
401003561	10	16	5	2
401003770		35		
401006333	33	10	6,3	2,5
401008276	100	25		
401008488			10	
401009714	220			

Condensatori elettrolitici 105°

subminiatura

105° subminiature electrolytic capacitors

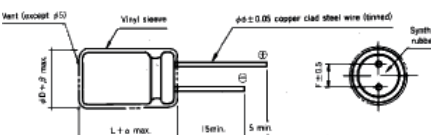

Bassa corrente di fuga

Marca: ELNA

Tipo: RC 2 S - GZ3


Tolleranza: ± 20%

Temperatura di lavoro: -40° ÷ +105°C

Codice	Capac. (μF)	V nom. (Vcc)	Ø D x L	Ø d	F
401000002	0,1	50	4 x 7	0,45	1,5
401000055	0,22				
401000106	0,33				
401000476	1	63	5 x 7	0,45	2
401001055	2,2				
401001997	3,3				
401002556	4,7	35	4 x 7	0,45	1,5
401002620		50	5 x 7		
401002763		63	5 x 7		
401003558	10	16	4 x 7	0,45	1,5
401003768		35	5 x 7		
401003890		50	5 x 7		
401005160	22	35	6,3 x 7	0,45	2,5
401006401	33	25			
401006948	47				
401008319	100	16			

Condensatori elettrolitici per applicazioni audio

Electrolytic capacitors for audio applications

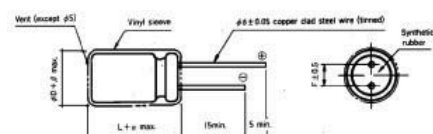

Reofori radiali

Marca: ELNA

Tipo: ROA "CERAFINE"

Tolleranza: ± 20%


Temperatura di lavoro: -40° ÷ +85°C

Codice	Capac. (μF)	V nom. (Vcc)	Ø D x L	Ø d	F
401000434	1	50	5 x 11	0,6	2
401007163	47	35	10 x 12,5		5
401008621	100		10 x 20		
401008974			16 x 25	0,8	7,5
401010128	220		12,5 x 25		5
401010576		100	18 x 40		
401012322	470	63	16 x 35,5	0,8	7,5
401013117	1000	35	18 x 35,5		

Condensatori elettrolitici miniaturizzati

"Snap In"

"Snap In" miniaturized electrolytic capacitors

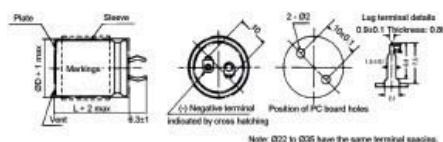

Marca: ELNA

Tipo: LP 4 / LP 5 / LA 5

Montaggio: verticale snap-in

Reofori: per c.s.; passo 10

Tolleranza: ± 20%