


CUSTOMER : _____
ITEM NO. : 11/5116 MF52-472k
APPLICATION : _____
DATE : 2004/02/11

CUSTOMER			PRODUCE		
APPROVAL			APPROVAL		
TECHNICAL	EXAMINE AND VERIFY	APPROVE	TECHNICAL	EXAMINE AND VERIFY	APPROVE

SUPPLIER P/N : MF52-472 K

DIMENSION : (mm)

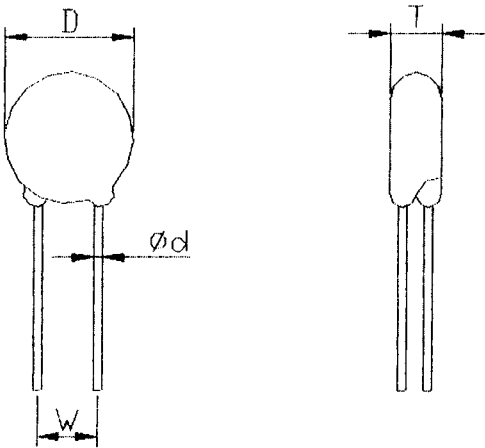

ITEM NO.	Dmax	Tmax	w	$\varnothing d$
MF52-472K	4.0	3.0	3.0 ± 1.0	0.45 ± 0.05

ELECTRONIC PARAMETER :

RESISTOR VALUE $\Omega \pm 10\%$	B VALUE $K \pm 5\%$	DISSIPATIVE FACTOR $\text{mw}/^{\circ}\text{C}$	TIME FACTOR S	WORK TEMPERATURE $^{\circ}\text{C}$
4700	3400	≥ 3.0	≤ 15	-40~+180

INSPECTION METHOD

NUMBER	INSPECTION ITEM	CONDITION	SPECIFICATION REQUIREMENT
1	APPEARANCE AND MARK		THE MARK SHOULD BE CLEAR AND NO DAMAGE ON THE BODY
2	DIMENSION		MEET WITH THE DIMENSION DRAWING
3	RESISTOR VALUE		$4700 \Omega \pm 10\%$
4	DIELECTRONIC STRENGTH	700V AC/1 MINUTES	SHOULD NO SHORT CIRCUIT $\Delta R/R \Delta \leq \pm 15\%$
5	INSULATE RESISTOR VALUE	TEST VOLTAGE DC $150 \pm 10\text{V}$	$\geq 500\text{M} \Omega$ $\Delta R/R \Delta \leq \pm 15\%$
6	SOLDING CHARACTERISTIC	SOLD TEMPERATURE : $235 \pm ^{\circ}\text{C}$ SOLD TIME : 3S	AREA COVERED : $\geq 98\%$ BY TIN
7	B VALUE	PUT IN THERMOSTATIC BATH $T_1=25^{\circ}\text{C}$ $T_2=85^{\circ}\text{C}$	$3400 \pm 5\%$