



Nominal data

Type	7056 ES	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Speed	min ⁻¹	2800
Power input	W	27.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	65
Air flow	m ³ /h	320
Sound power level	B	6.4
Sound pressure level	dB(A)	51


ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



Technical features

Mass	0.900 kg
Dimensions	150 x 172 x 38 mm
Material of impeller	Metal
Housing material	Metal
Direction of air flow	Air exhaust over bars
Direction of rotation	Right, looking at rotor
Bearing	Ball bearings
Lifetime L10 at 40 °C	60000 h
Lifetime L10 at maximum temperature	32000 h
Connection line	2 flat plugs 2.8 x 0.5 mm. Housing with grounding lug and tapping screw M4 x 6 (TORX).
Motor protection	Protected from overload by a thermal switch
Approval	VDE, CSA, UL, CE

Product drawing

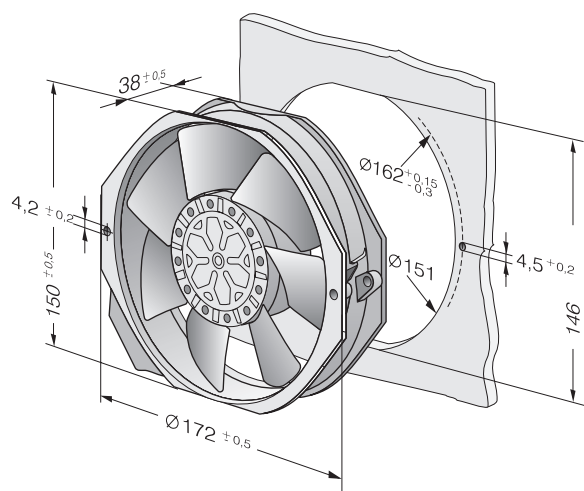

Charts: Air flow

