

Rating:

VM1 1A 125VAC
VM3 3A 125VAC
VM5 A 250VAC
VM10 A 250VAC

Insulation Resistance: >100M Ω DC500V

Withstand Voltage: AC 1,000V 1minute

Contacts Resistance: <30m Ω

Soldering Temperature: 255°C max. 5 sec

Mechanical Life: 5,000,000 cycles



Electrical Life: 200,000 cycles

Ambient Temper. Used: -25°C to +80°C

Ambient Humidity Used: <85%RH


Operating Force: on request

VM - Series Micro Switches

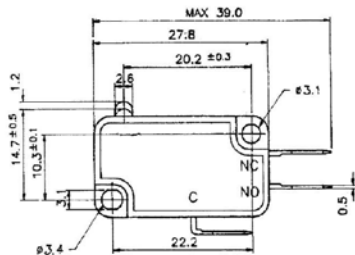

4/7420 VM5-00N (110 Gr.)

SCHEMATIC



MOUNTING HOLES

