


DEVIATORE UNIPOLARE

ROCKER SWITCH (3P) 2POS ON-ON 16A

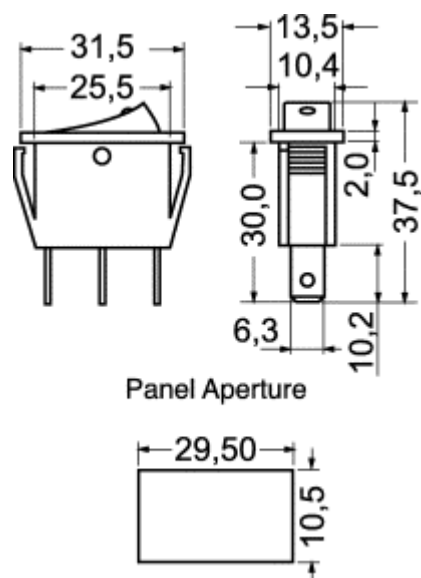

Contact Resistance	20m ,MAX
Insulation Resistance	500VDC,50M
Dielectric Strength	1250VAC,1MIN
Operating Temperature	T100
Electrical Life	10,000 Cycles
Operating Data	16A - 250VAC

PORT.: 16 A-250 V
 CORPO: abs
 COLORE CORPO: nero
 TEMP. LAV.: -20°C ÷ 125°C
 CONTATTI: argento
 FISS. PANN.: autobloccante
 TERMIN.: faston passo 6,35
 PER FASTON: [4/11520](#)

Conforme alle normative:

