


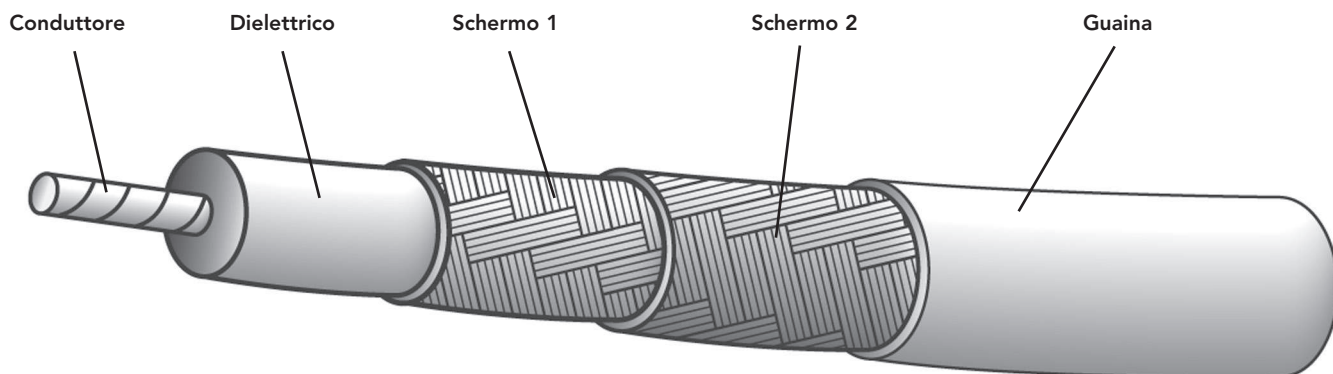

N.RG	Ø ARMATURA	Ø E TIPO GUAINA	SCHERMO 2	SCHERMO 1	Ø E TIPO DIELETTRICO	mm E TIPO CONDUTTORE	IMPEDENZA ohm	CAPACITÀ NOMINALE pf/m	TENSIONE DI ESERCIZIO V	VELOCITÀ DI PROPAGAZIONE
RG6AU	-	8,50 GIIA	C	SC	4,80 P	0,72 CW	75	66	2700	66
RG11AU	-	10,30 GIIA	-	C	7,20 P	7X0,40 T C	75	67	5000	66
RG12AU	12	10,30 GIIA	-	C	7,20 P	7X0,40 T C	75	67	5000	66
RG22BU	-	10,30 GIIA	TC	TC	7,30 P	7X0,39 C	95	52	1000	66
RG58CU	-	4,95 GIIA	-	TC	2,95 P	19X0,18 T C	50	95	1900	66
RG59BU	-	6,20 GIIA	-	C	3,70 P	0,58 CW	75	69	2300	66
RG62AU	-	6,20 GIIA	-	C	3,70 PA	0,64 CW	93	45	750	84
RG62BU	-	6,20 GIIA	-	C	3,70 PA	7X0,20 CW	93	45	750	84
RG71BU	-	6,35 GIIA	TC	C	3,70 PA	0,64 CW	93	45	750	84
RG108U	-	5,95 GIIA	-	TC	2,01 P	2X7X0,39 T C	78	77	1000	68
RG122U	-	4,10 GIIA	-	TC	2,50 P	27X0,13 T C	50	96	1900	66
RG174U	-	2,55 GIIA	-	TC	1,50 P	7X0,16 CW	50	99	1500	66
RG212U	-	8,45 GIIA	SC	SC	4,70 P	141 S C	50	97	3000	66
RG213U	-	10,30 GIIA	-	C	7,25 P	7X0,75 S C	50	97	5000	66
RG214U	-	10,80 GIIA	SC	SC	7,25 P	7X0,75 S C	50	97	5000	66
RG216U	-	10,80 GIIA	C	C	7,25 P	7X0,40 T C	75	67	5000	66
RG217U	-	13,80 GIIA	C	C	9,40 P	2,70 C	50	97	7000	66
RG218U	-	22,10 GIIA	-	C	17,25 P	4,95 C	50	97	11000	66
RG220U	-	28,50 GIIA	-	C	23,10 P	6,60 C	50	97	14000	66
RG223U	-	5,40 GIIA	SC	SC	2,95 P	0,90 C	50	97	1900	66

GUAINA

GIIA: PVC ANTICONGELANTE

DIELETTRICO

P: POLIETILENE
PA: POLIETILENE ARIA

CONDUTTORI

C: RAME ROSSO
SC: RAME ARGENTATO
TC: RAME STAGNATO
CW: ACCIAIO RAMATO