


Anti - vandal puh button



- ⦿ Ø 12mm
- ⦿ Switch Rating: 2A/36VDC
- ⦿ Contact Configuration: 1NO
- ⦿ Operation Type: Momentary
- ⦿ The Crust Material: Stainless Steel/ Nickel Plated Brass
- ⦿ IP Degree: IP65, IK08

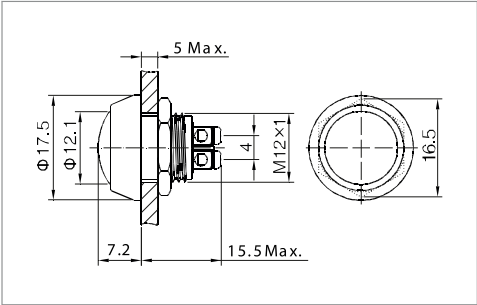

|                       |         |                                         |
|-----------------------|---------|-----------------------------------------|
| Specification         |         | 4/6547                                  |
| Terminal Type         |         | Screw Terminal                          |
| Switching             |         | X(double - break slow - motion contact) |
| Max. Switch Rating    |         | 2A/36 VDC                               |
| Contact Resistance    |         | ≤ 50mΩ                                  |
| Insulation Resistance |         | ≥ 1000MΩ                                |
| Dielectric Intensity  |         | 2000VAC                                 |
| Operating Temp        |         | - 20℃ ÷ + 55℃                           |
| Mechanical Life       |         | 1,000,000 cycles                        |
| Electrical Life       |         | 200,000 cycles                          |
| Panel Thickness       |         | 1 ÷ 5 mm                                |
| Torque                |         | 5 ÷ 14 Nm                               |
| Operation Pressure    |         | About 5N                                |
| Operation Travel      |         | About 2.5mm                             |
| IP Degree             |         | IP65,IK08                               |
| Material              | Contact | Silver Alloy                            |
|                       | Button  | Nickel Plated Brass                     |
|                       | Body    | Nickel Plated Brass                     |
|                       | Base    | PBT                                     |
|                       | RoHS    | Made to order                           |
| Head Color            |         | ...                                     |