


Cable glands Progress® nickel-plated brass

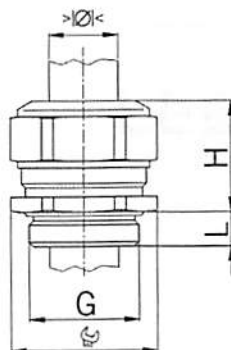

- Available with sealing inserts conformity with EN 45545. When placing an inquiry, prefix the article number by the capital F.
- Material: Nickel-plated brass
- Seal: TPE
- O-ring: NBR
- minimal operation temperature: -40°C
- maximum operation temperature: +100°C
- Protection class: IP 68 (up to 10 bar)
- Further protection: IP 69K
- Progress MS
- Short entry thread Pg
- Two-piece sealing insert
- overall length insulated
- Entry thread: Pg 9
- minimal clamping range: 6.0 mm
- maximum clamping range: 10.5 mm
- Wrench size: 18 mm
- Dimension H: 22 mm
- Thread length L: 6.0 mm
- UL - Clamping range: 7.1-8.0 mm

Art. No.: 1060.09

- E-No.: 121 063 108
- Inner packaging: ST
- Outer packaging: 50 ST
- Individual net weight: 18,300 G
- Single volume: 0,018 L
- EAN: 7611614106472
- ETIM40: EC000441