


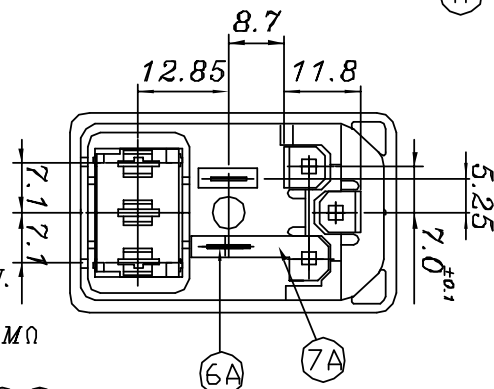


1. **RATING** : 10A 250VAC

2. **WITHSTAND VOLTAGE** : AC 2000V/1 MIN.

3. **INSULATION RESISTANCE** : MORE THAN 100MΩ
(at DC 500V)

4. **SAFETY** :

7A	CONNECTOR	1	Bspl-1/2H	t=0.6	Sn-plated	Q101-07A
6B	FUSE HOLDER	1	Bspl-1/2H	t=0.8	Sn-plated	Q101-06B
6A	FUSE HOLDER(SHORT)	1	Bspl-1/2H	t=0.5	Sn-plated	Q101-06A
4F	CONNECTION TERMINAL	2	Bspl-1/2H	t=0.8	Sn-plated	Q101-04F
3B	CENTER TERMINAL	1	Bspl-1/2H	t=2.0	Sn-plated	Q101-03B
2B	EDGE TERMINAL	2	Bspl-1/2H	t=2.0	Sn-plated	Q101-02B
1J	FUSE COVER	1	Nylon#66	94v-2		Q101-01J
1I	BODY	1	Nylon#66	94v-2		Q101-01I
L, chun-ting	930108					
L, chun-ting	930108					
L, chun-ting	930108		(0.8, 1.0, 1.5, 2.0, 3.0)			
			A101-0AO		1:1	MM
						A101-0AO