

F

E

D

C

B

A

F


E

D

C

B

A

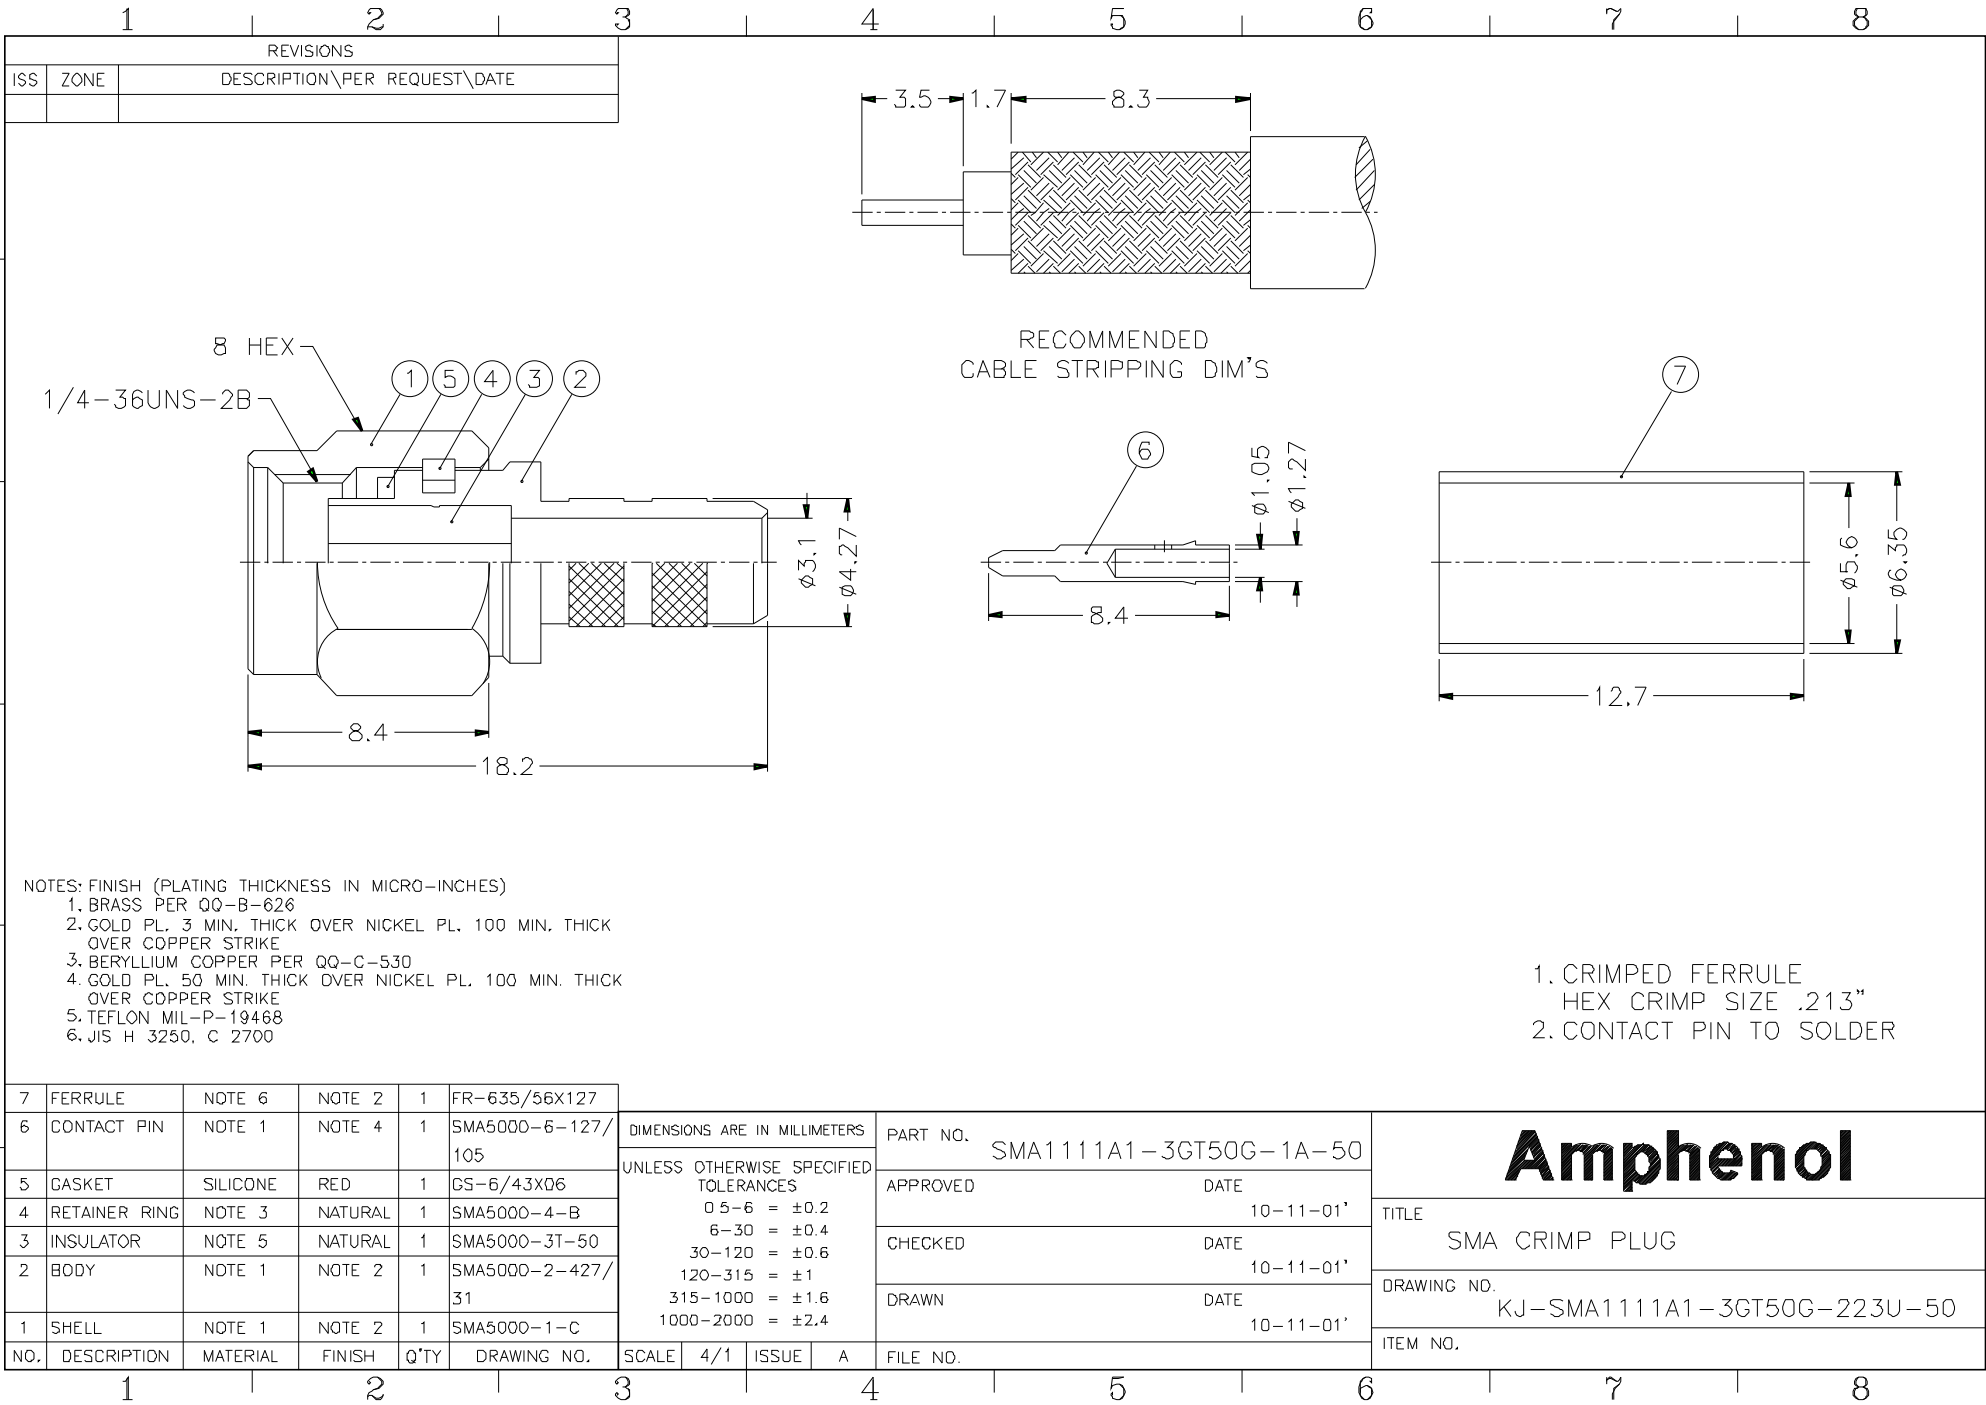

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468
6. JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

7	FERRULE	NOTE 6	NOTE 2	1	FR-635/56X127	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.	SMA1111A1-3GT50G-1A-50	Amphenol	
6	CONTACT PIN	NOTE 1	NOTE 4	1	SMA5000-6-127/105					APPROVED	DATE		
5	GASKET	SILICONE	RED	1	GS-6/43X06					CHECKED	DATE	TITLE	
4	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B					DRAWN	DATE	DRAWING NO.	
3	INSULATOR	NOTE 5	NATURAL	1	SMA5000-3T-50							KJ-SMA1111A1-3GT50G-223U-50	
2	BODY	NOTE 1	NOTE 2	1	SMA5000-2-427/31	SCALE	4/1	ISSUE	A	FILE NO.		ITEM NO.	
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.								