

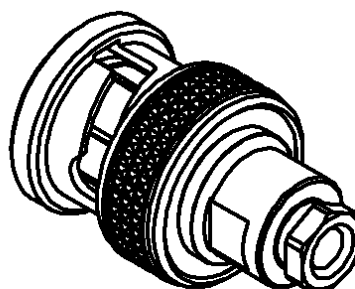


STRAIGHT PLUG CLAMP TYPE


R142.004.000

CABLE 2.6/75 S

Series : BNC 75

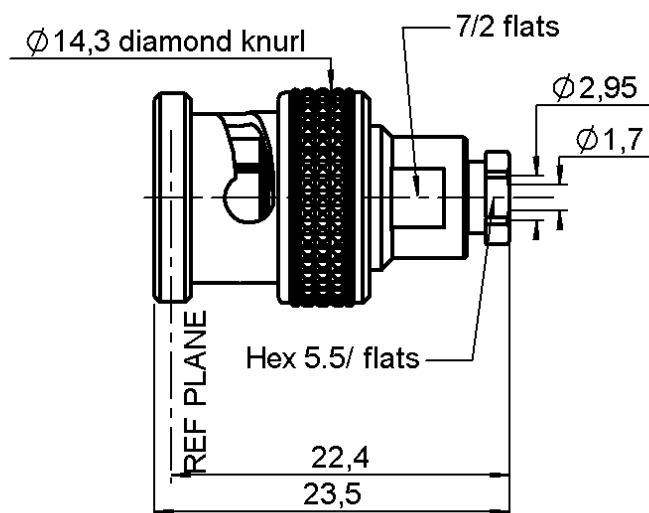

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-
OTHERS PARTS	BRASS	NICKEL 2
-	-	-
-	-	-

Issue : 0040 H

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL R

STRAIGHT PLUG CLAMP TYPE**CABLE 2.6/75 S****R142.004.000**Series : **BNC 75****PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		75	Ω
Frequency		0-1.5	GHz
VSWR	1.30	+	0,0000 x F(GHz) Maxi
Insertion loss		0.115	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	57	- F(GHz)) dB Maxi
Voltage rating		335	Veff Maxi
Dielectric withstanding voltage		1000	Veff mini
Insulation resistance		5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating end		27	N mini
Axial force – Opposite end		27	N mini
Torque		NA	N.cm mini

Recommended torque			
Mating		NA	N.cm
Panel nut		NA	N.cm
Clamp nut		40	N.cm
A/F clamp nut		5,5000	mm

Mating life		500	Cycles mini
Weight		0,0000	g

ENVIRONMENTAL

Operating temperature		-65/+165	° C
Hermetic seal		NA	Atm.cm3/s
Panel leakage		NA	

SPECIFICATION

QAE 06-02 - -

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3,50	1,00	8,00	2,00	4,50	0,00

Assembly instruction :

Recommended cable(s)

RG 179

RG 187

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	58	N mini
- torque	NA	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHER CHARACTERISTICS

-

Issue : **0040 H**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 