


Type				Off Temp. (°C)	On Temp. (°C)	Contact State	Obtained standard and Electrical parameters	Remark
4/6000	50°C	4/6006	80°C			N. O	UL 250V~10A (E202192)	
4/6003	60°C	4/6007	90°C				VDE 250V~10A (40019583)	
4/6005	70°C							



Marking:

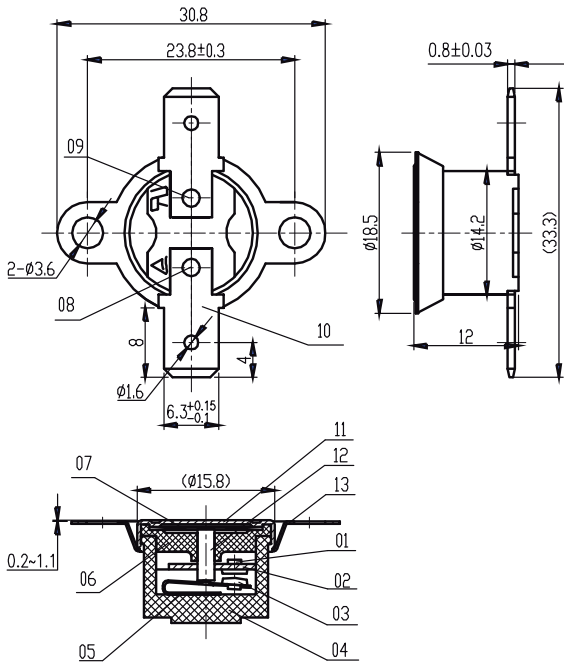

Specification

- Standards According:GB14536.1-2008, GB14536.10-2008, GB/T22687-2008, UL873;IEC60730-1, IEC60730-2-9;
- Resistance between terminals:below 50mΩ at DC5V/0.25A (initial figure);
- Insulated resistance:above 100MΩ with DC500V between terminals and cap ;
- Dielectric strength: AC1500V for 1 minute between terminals and cap without breakdown ;
- Heat resistant :170°C;
- The product meet with the orders of 2002/95/EC RoHS and the orders of 1907/2006/EC REACH;
- Packing:1 box=2000pcs=100pcs×20Bags,Box size :470×340×220mm;
1 box=2000pcs=400pcs×5 box, Box size :470×340×220mm.
- the measurements no marking toletance,chose the free tolerance from below table.

free tolerance table

measurement range	0~9	9.1~16	16.1~30	>30
tolerance value	±0.2	±0.3	±0.4	±0.5

13	flange			1	SUS430			
12	Actuator Pin			1	Ceramic			
11	Cap			1	Aluminium			
10	Terminal			2	Brass	Nickel plated		
09	Long Rivet			1	Steel	Tin plated		
08	Short Rivet			1	Steel	Tin plated		
07	Bimetal Disc			1	Bimetal			
06	Top Cover			1	PF			
05	Movable arm			1	Alloy copper			
04	Case			1	PF			
03	Movable Contact			1	AgNi/Cu (T2)			
02	Stationary arm			1	Brass			
01	Stationary Contact			1	AgNi/Cu (T2)			
No.	Parts Name			Qty.	Material	Remark		
				Snap Action Thermostat	SN:20120511-05			
					Sample	Qty.	Weight	Proportion
Mark	Qty.	Content	Signature					
Designed					Page 1 of 1 Page			
Reviewed								
Approved								