


pico fusibili PF 7,54x3,1 rapido 125V



Tubetto in plastica
Colore Giallo Ocra

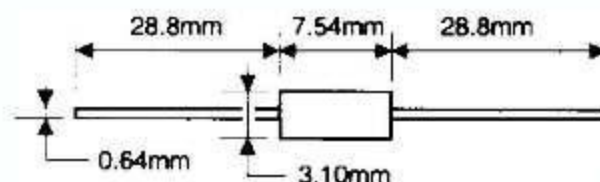

BUSSMANN-MCR




**CORRENTE
NOMINALE**

mV

I²t

125 mA	1/8	1,52	$7,3 \times 10^{-6}$
250 mA	1/4	0,757	$1,2 \times 10^{-4}$
375 mA	3/8	0,732	$1,1 \times 10^{-4}$
500 mA	1/2	0,650	$6,2 \times 10^{-5}$
750 mA	3/4	0,547	$7,5 \times 10^{-5}$
1 A	A 1	0,242	0,01468
1,5 A	A 1 1/2	0,201	0,03892
2 A	A 2	0,159	0,1135
2,5 A	A 2 1/2	0,148	0,2478
3 A	A 3	0,146	0,4524
3,5 A	A 3 1/2	0,143	0,5633
4 A	A 4	0,125	0,9639
5 A	A 5	0,111	1,8212
7 A	A 7	0,099	1,4762
*10 A	A 10	0,115	4,4069

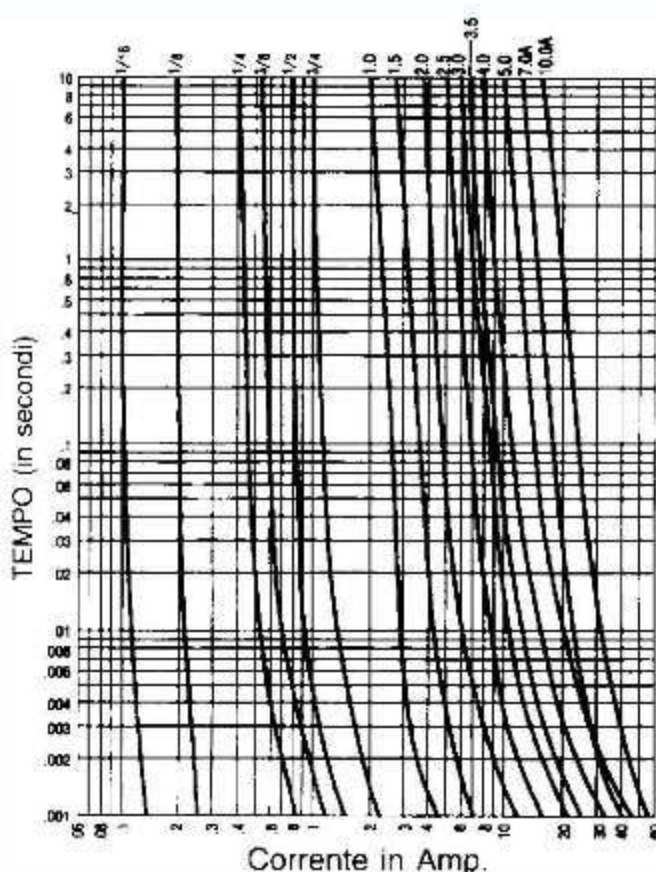

*10 A impiegare con tensione 60V

Corrente di Fusione

Alla corrente $I_n > 4h$

Corrente nominale I_n	1 x I_n	2,5 x I_n
	min	max
0 - 10 A	240 min	5 sec.