



DATE	REV	DESCRIPTION	BY	CHKD
03/15	A/0	NEW	Young	

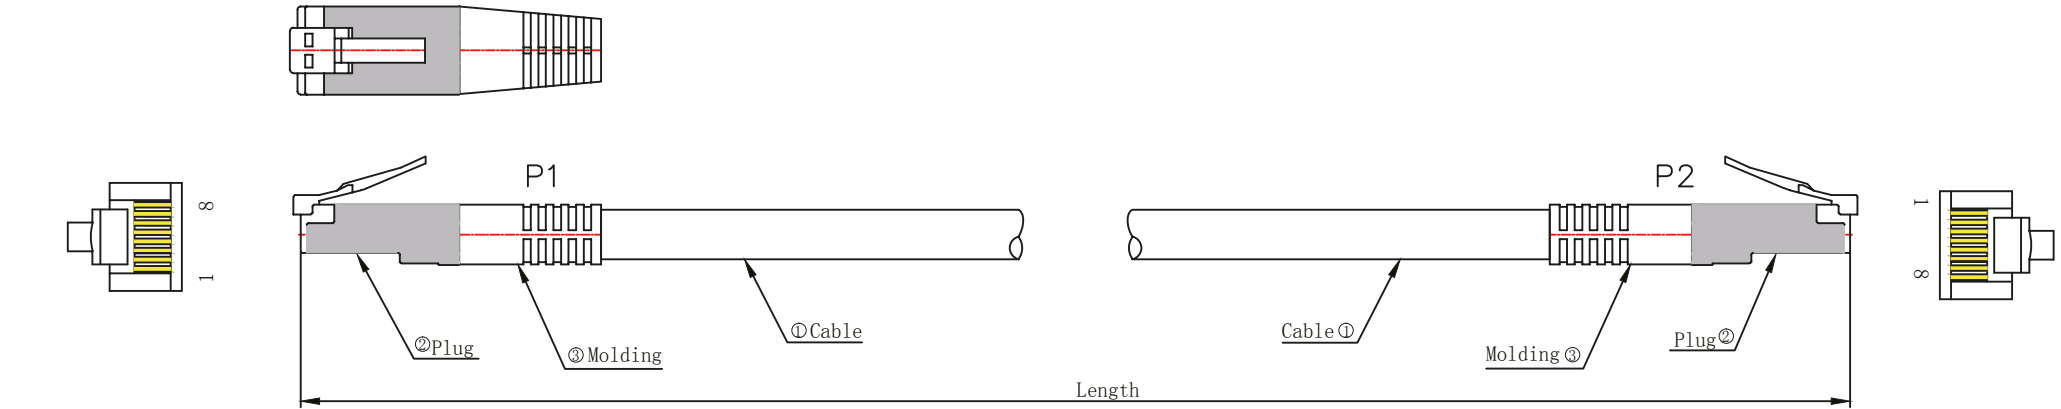

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Cable ①	
conductor	26AWG stranded bare copper
insulation	HDPE
core size	min:0.80mm, max:0.84mm
core color	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
cross member	none
cable diameter	5.5±0.3mm
sheath material	pvc
Plug ②	
housing	polycarbonate UL94V-2
color	transparent
contact blade	phosphor bronze
gold plating	50u"or as customer requirement
Molding ③	
material	70℃ PVC

PINOUT			
PA/R	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Unless specified on the drawing, tolerances are per the follows:
. ± 1
.X ± 0.2
.XX ± 0.05

3RD

WPCABLING					
DRAW.NO		ITEM	CAT5E FTP PATCH CABLE PVC		
CABLE CODE	WPC-PAT-5Fxxx	DRAW	Young	DATE	2012/07/19
SCALE		CHECKER		APPROVAL	ANDREW
UNIT	mm	SHEET	1	OF	1