


## DESCRIPTIONS:

- Zinc alloy die cast housing, chrome plated.
- Brass key, nickel plated, with plastic cap.
- Silver plated contacts and terminals.
- 16 Combinations available.

## SPECIFICATIONS:

- Contact Rating: 1A 125VAC, 0.5A 250VAC.
- Contact Resistance: 10 Milli-Ohms Max.
- Insulation Resistance: 200 Meg-Ohms.
- Dielectric Strength: 1000 VAC-1 Minute.

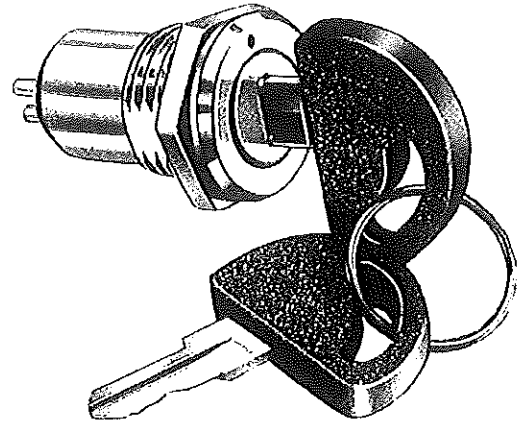

## KEY-PULL FIGURES

o-Off Position

■-Indicates Key-Pull

•-Indicates No Key-Pull



Fig. 1



Fig. 2



Fig. 3

|         | Fig. No | Pole | Positions | Terminals | Key Pulls | Turn | ① ② ③     | Type |
|---------|---------|------|-----------|-----------|-----------|------|-----------|------|
|         | 1       | 1    | 2         | 3         | 2         | 60°  | On On     | SPDT |
| 35/1710 | 2       | 1    | 2         | 2         | 2         | 60°  | Off On    | SPST |
| 35/1712 | 3       | 1    | 3         | 3         | 3         | 120° | Off On On | SPDT |

Unit: mm  
HOLE SIZE

