

Contaore c.a. a motorino sincrono

Connessione:	
- mista	faston 6,3x0,8 mm e morsetto a vite
- semplice	faston 6,3x0,8 mm
Alimentazione	24 V, 48 V, 60 V, 110 V, 230 V (± 10%)
Frequenza	50 Hz o 60 Hz
Potenza assorbita	1 VA a 230 V, 50 Hz
Protezione:	
- sul frontale	IP 40
- lato connessioni	IP 00
- sul frontale a richiesta	IP 65
Temperatura di funzionamento	-25 °C + 70 °C
Precisione	1/100 di ora (36 sec.)
Totalizzazione massima	99.999,99 ore
Numero delle cifre	5 unità, 2 decimali
Altezza cifra	4 mm
Colore cifre	50 Hz: unità = bianco / decime = rosso 60 Hz: unità = bianco / decime = nero
Custodia	colore nero, in materiale termoplastico autoestinguente
Classificazione	V0, secondo UL-94
Norme	DIN 43700/43718 e UNEL 0551
Fissaggio	staffa in plastica "G"

AC synchronous motor hour meter

Connection:	
• combined	flat pins 6,3x0,8 mm with screw terminal
• simple	flat pins 6,3x0,8 mm
Supply voltage	24 V, 48 V, 60 V, 110 V, 230 V (±10%)
Mains frequency	50 Hz or 60 Hz
Power consumption	appr. 1 VA at 230 V, 50 Hz
Protection class:	
- front side	IP 40
- terminals side	IP 00
- front side, on request	IP 65
Operating temperature range	-25 °C ÷ +70 °C
Reading accuracy	1/100 hour (36 sec.)
Counting range	99.999,99 hours
Number of digits	5 integers plus 2 decimals
Height of digit	4 mm
Colour of digits	50 Hz: integer = white / decimals = red 60 Hz: integer = white / decimals = black
Case	black colour, in self-extinguishing thermo-plastic material
Classification	V0, according to UL-94
Standards	DIN 43700/43718 and UNEL 05511.
Mounting	plastic fork clamp "G"

Contaore c.c. a motore passo-passo

Connessione:	
- mista	faston 6,3x0,8 mm e morsetto a vite
- semplice	faston 6,3x0,8 mm
Alimentazione	6-12 V, 12-36 V, 36-80 V, 110 V (± 10%)
Potenza assorbita	0,25 W a 36 V
Protezione:	
- sul frontale	IP 40
- lato connessioni	IP 00
- sul frontale a richiesta	IP 65
Temperatura di funzionamento	-10 °C + 55 °C
Precisione	1/10 di ora (6 min.)
Totalizzazione massima	999.999,9 ore
Numero delle cifre	6 unità, 1 decimale
Altezza cifra	4 mm
Colore cifra	unità = bianco / decina = rosso
Colore custodia	nero
Fissaggio	staffa in plastica "G"

DC stepping motor hour meter

Connection:	
• combined	flat pins 6,3x0,8 mm with screw terminal
• simple	flat pins 6,3x0,8 mm
Supply voltage	6-12 V, 12-36 V, 36-80 V, 110 V (±10%)
Power consumption	0,25 W at 36 V
Protection class:	
- front side	IP 40
- terminals side	IP 00
- front side, on request	IP 65
Operating temperature range	-10 °C ÷ +55 °C
Reading accuracy	1/10 hour (6 min.)
Counting range	999.999,9 hours
Number of digits	6 integers plus 1 decimal
Height of digit	4 mm
Colour of digits	integer = white / decimal = red
Case	black colour, in self-extinguishing thermo-plastic material
Classification	V0, according to UL-94
Standards	DIN 43700/43718 and UNEL 05511.
Mounting	plastic fork clamp "G"






Contaore c.a.
AC hour meters

30.F	24 V ~ 50 o 60 Hz
30.F	48 V ~ 50 o 60 Hz
30.F	60 V ~ 50 o 60 Hz
30.F	110 V ~ 50 o 60 Hz
30.F	230 V ~ 50 o 60 Hz



Contaore c.c.
DC hour meters

30.F	6 - 12 V =
30.F	12 - 36 V =
30.F	36 - 80 V =
30.F	110 V =

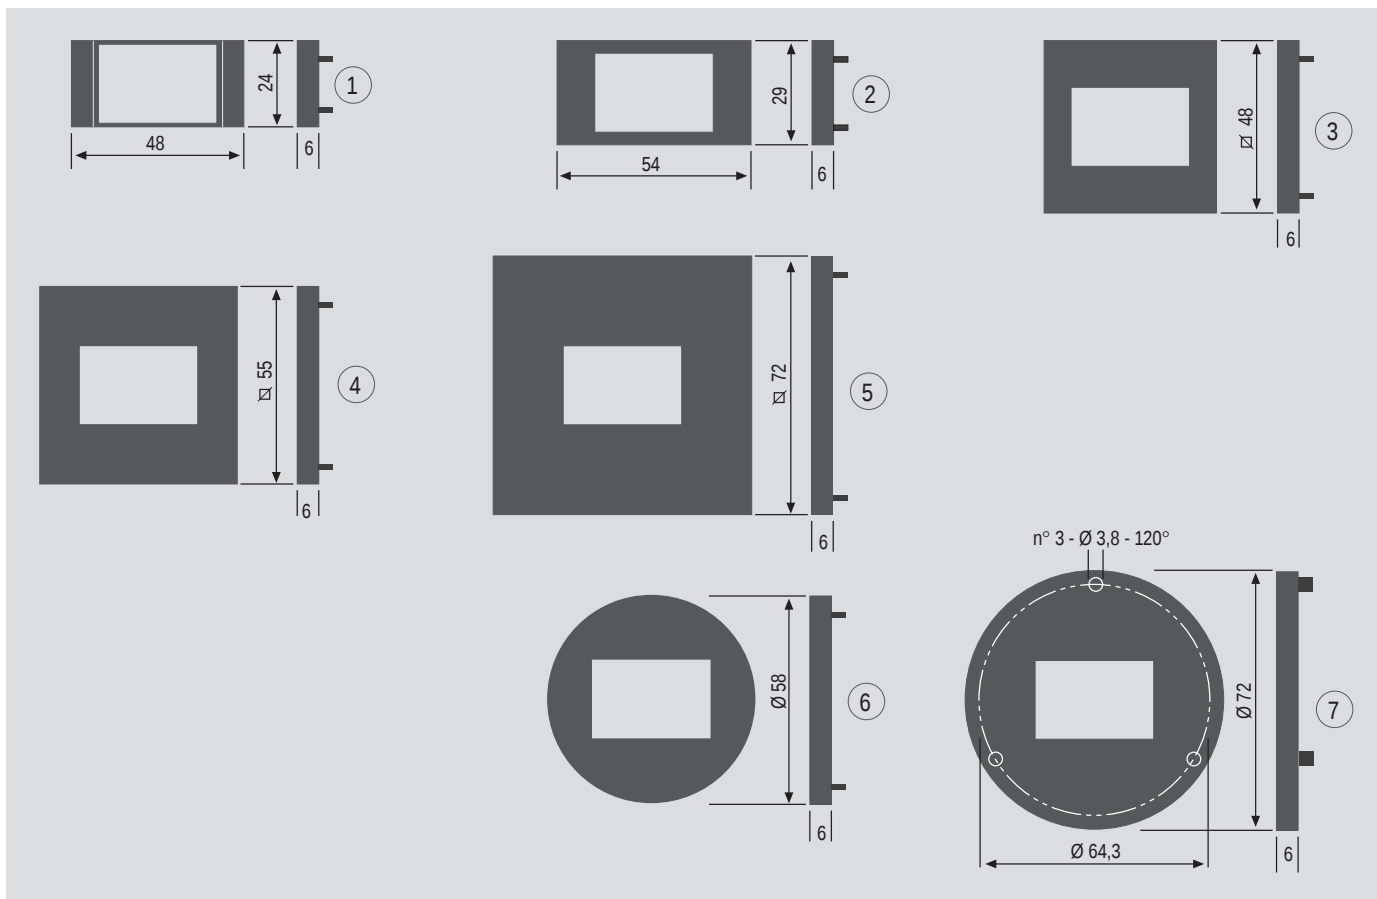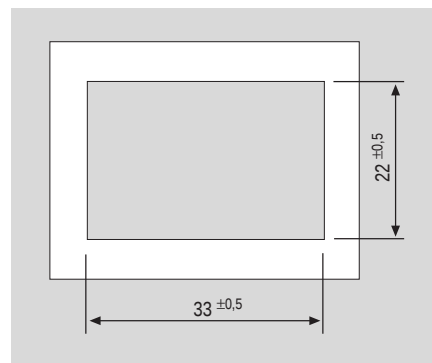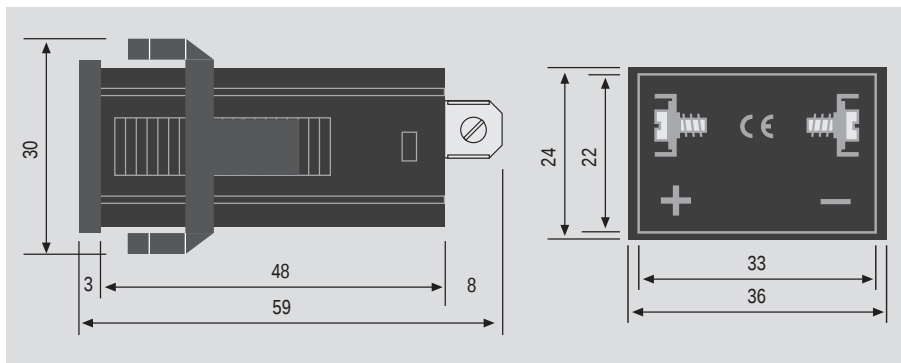

Flange

Adapter frames

tipo type	dima di foratura mounting hole	fissaggio fixing fork	staffa clamp
1	48 x 24 mm	G	standard
2	54 x 29 mm	G	standard
3	48 x 48 mm	G	grande
4	55 x 55 mm	G	grande
5	72 x 72 mm	G	grande
6	Ø 58 mm	G	grande
7	Ø 72 mm	H	standard