

4 mm dia. SAFETY SERIES

BANANA PLUGS

BDR-SR/BDR-PR BANANA PLUGS NFC 93440 standard

Compatible with all 4 mm dia. sockets

Connection can be made onto : – cable (max. 2.5 mm² cross section)
– 4 mm dia. banana


CHARACTERISTICS

– Current rating max	: 30 A (at 20°C)
– Dielectric withstanding voltage	: 2 500 V rms 50 Hz
– Operating voltage	: 750 V rms 50 Hz
– Insulation resistance	: $\geq 5\,000\text{ M}\Omega$
– Contact resistance	: $\leq 0,5\text{ m}\Omega$
– Mechanical endurance	: $\geq 10\,000$ matings
– Average insertion force	: 25 N
– Operating temperature	: – 40°C + 85°C
– Insulation	: thermoplastic

► Packaging : 10 pieces of the same part number.

• BDR-SR BANANA PLUGS

Part number	Standard
R 941 460 600 / Black	NFC 93440 – KT12R
R 941 461 600 / Red	
R 941 462 600 / Green	
R 941 463 600 / Blue	
R 941 464 600 / Yellow	

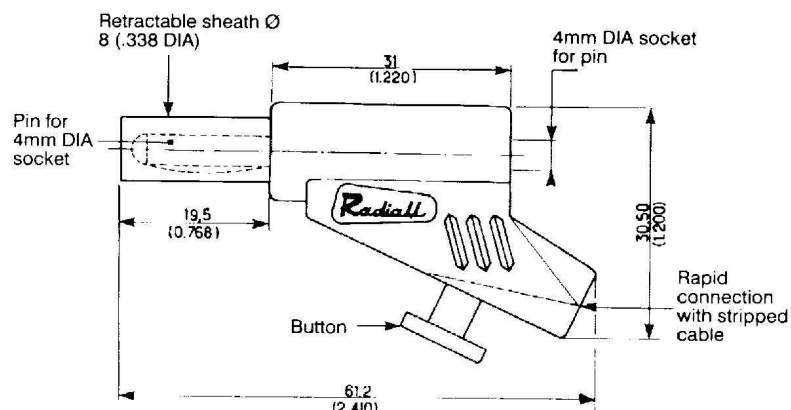

• BDR-PR BANANA PLUGS

These plugs are fitted with a **NON THERMO-FUSIBLE** retractable sheath in PTFE (withstands a 350°C ± 10°C temperature during 10 seconds without deformation).

Part number	Standard
R 941 480 600 / Black	NFC 93440 – KT12R DCN 5935 BA
R 941 481 600 / Red	
R 941 482 600 / Green	
R 941 483 600 / Blue	
R 941 484 600 / Yellow	

