


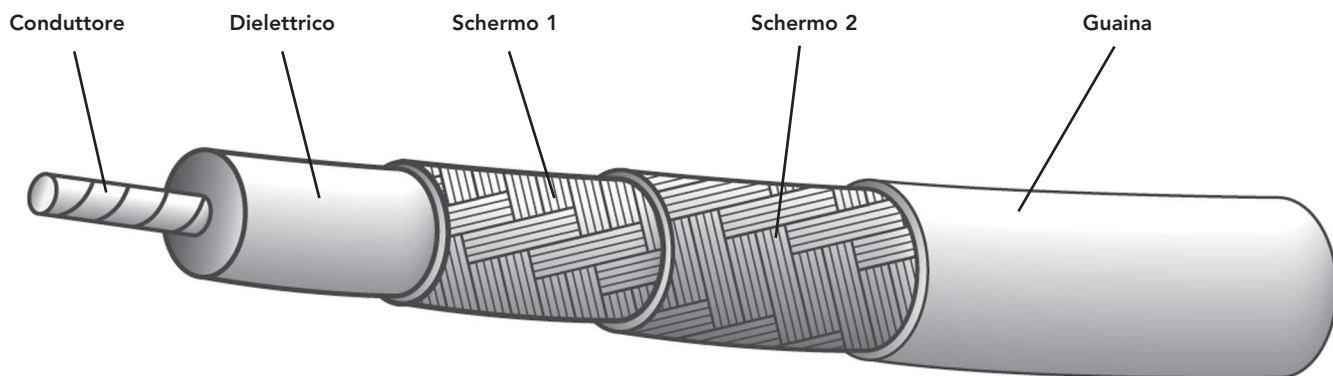

N.RG	Ø ARMATURA	Ø E TIPO GUAINA	SCHERMO 2	SCHERMO 1	Ø E TIPO DIELETTRICO	mm E TIPO CONDUTTORE	IMPEDENZA ohm	CAPACITÀ NOMINALE pf/m	TENSIONE DI ESERCIZIO V	VELOCITÀ DI PROPAGAZIONE
RG142BU	-	4,95 FEP	SC	SC	2,95 PTFE	0,94 SPCS	50	105	1400	69,5
RG178BU	-	1,80 FEP	-	SC	0,84 PTFE	7X0,10 SPCS	50	105	750	69,5
RG179BU	-	2,54 FEP	-	SC	1,60 PTFE	7X0,10 SPCS	75	64	900	69,5
RG180BU	-	3,58 FEP	-	SC	2,59 PTFE	7X0,10 SPCS	95	50	1100	69,5
RG187AU	-	2,54 FEP	-	SC	1,60 PTFE	7X0,10 SPCS	75	72	900	69,5
RG188AU	-	2,54 FEP	-	SC	1,52 PTFE	7X0,17 SPCS	50	105	900	69,5
RG196AU	-	2,05 FEP	-	SC	0,86 PTFE	7X0,10 SPCS	50	105	1000	69,5
RG225U	-	10,3 FEP	SC	SC	7,24 PTFE	7X0,80 SC	50	105	3700	69,5
RG302U	-	5,13 FEP	-	SC	3,71 PTFE	0,643 SPCS	75	72	1700	69,5
RG303U	-	4,32 FEP	-	SC	2,95 PTFE	0,94 SPCS	50	105	1400	69,5
RG316U	-	2,49 FEP	-	SC	1,52 PTFE	7X0,17 SPCS	50	105	900	69,5
RG393U	-	9,91 FEP	SC	SC	7,24 PTFE	7X0,80 SC	50	105	1875	69,5
H8399	-	2,5 FEP	-	SC	2,54 PTFE	7X0,33 SC	25	200	600	69,5

GUAINA
FEP: -55°C+200°C
PFA: -55°C+230°C

DIELETTRICO
PTFE

CONDUTTORI
SC: RAME ARGENTATO
SPCS: ACCIAIO RAMATO
ARGENTATO