

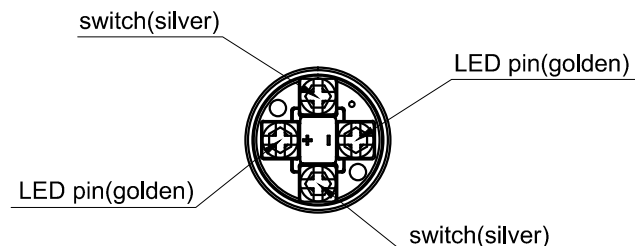



The shaded part is illuminated


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

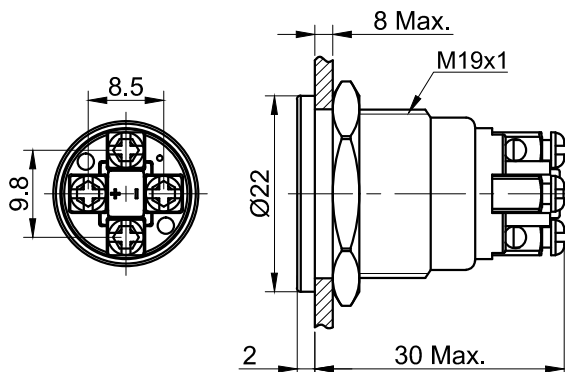

Contact Composition

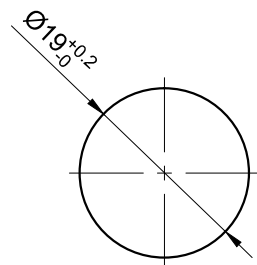


PANEL CUTOUT
MAX.PANEL THICKNESS
8 mm



Seal Ring

Switching Operation



Part Number:GQ19PF-10E/△/▲/◎

"△"	Lamp Color	"▲"	Lamp Voltage	"◎"	Crust Material
R	Red	6V	AC/DC 6V	N	Nickel Plated Brass
G	Green	12V	AC/DC 12V	S	Stainless Steel
Y	Yellow	24V	AC/DC 24V	A	Al alloy(black)
B	Blue	36V	AC/DC 36V		
W	White	110V	AC/DC 110V		
		220V	AC/DC 220V		
Other voltage can be made to order					

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC36V/2A.
- 2.Mechanical Life: ≥1,000,000cycles.
- 3.Electrical Life: ≥200,000cycles(DC36V)
≥50,000cycles(AC220V).
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25℃~ +55℃(No Freezing).
- 8.Operating Force: About 3N.
- 9.Operating Travel: About 2.5mm.
- 10.Torque: About 0.8Nm max.applied to nut.
- 11.IP Class: IP65.

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: ◎.
- 3.Body: ◎.
- 4.Base: PBT.

BRAND
品牌 **ONPOW**

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF ONPOW PUSH
BUTTON MANUFACTURE CO.,LTD. AND
SHALL NOT BE REPRODUCED COPIED OR
USED IN ANY MANNER WITHOUT THE
PRIOR WRITTEN CONSENT OF ONPOW
PUSH BUTTON MANUFACTURE CO.,LTD.

用途 APPD 审核	CH	2020/05/18
处理 CHKD 校对	NCH	2020/05/18
SCALE 比例	1.2 / 1	UNIT 单位 mm
DR. 制图	ZPD	2020/05/18

DIMENSIONS	TOLERANCE	TITLE 名称	SIZE 图纸
0.00 TO 18.00mm	±0.43mm	GQ Series Anti-vandal push button	A4
18.01 TO 30.00mm	±0.52mm	DWG NO. 图号	
30.01 TO 50.00mm	±0.62mm	GQ19PF-10E	
50.01 TO 80.00mm	±0.74mm	FILE NAME 档案名称	
		GQ19-E.DWG	
		SHEET 张	1 / 1
		REV. 更改	1