


R13-70.91

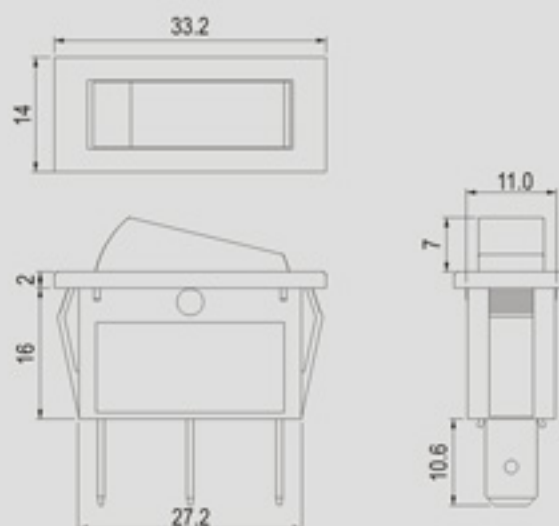

Rating
16A 125V AC 1/8HP 125VAC 10A 250V AC 1/3HP 250VAC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber and green colors.
- * Snap-in mounting, easy to install switch into panel.
- * The dimension of frame is 33.2*14, for shorter dimension of frame 31.5*14, please refer to page 1-23, item NO. R13-221.
- * **SO terminal is not available for function H & I.**

	X	Y
	X	Y
0.75~1.25	30.2±0.1	11.2±0.1
1.25~2	30.4±0.1	11.2±0.1
2~3	30.8±0.1	11.2±0.1
Cut-out for X8 ROCKER		



	X	Y
	X	Y
0.75~1.25	30.2±0.1	11.2±0.1
1.25~2.0	30.4±0.1	11.2±0.1
2.0~3.0	30.8±0.1	11.2±0.1

Ordering number instruction

R13- -

ROCKER	FUNCTION			TERMINAL
7 0 	Different position (動作特性不同)			0 1 .250" SQ
	A 2P SPST C 3P SPDT D 3P SPDT			0 5 SO
9 1 	Illuminated (帶燈)			
	B 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ			
	Momentary / Illuminated (彈回/帶燈)			
	B F 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ			
	Momentary (彈回)			
	F 2P SPST H 3P SPDT I 3P SPDT			
	Waterproof (防水)			
	A 8 2P SPST B 8 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ B 8 F 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ			
	C 8 3P SPDT D 8 3P SPDT F 8 2P SPST			