

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0-6 GHz
Withstanding voltage	1000 V
Insulation resistance	$\geq 5 \times 10^3$ M Ω

Mechanical & Environmental




Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Nickel-plated
Pin Contact	Brass, Gold-plated
Coupling Nut	Brass, Nickel-plated
Crimp Ferrule	Copper, Nickel-plated
Insulator	PTFE
Gasket	Silicone Rubber


Interface Standards

TNC	IEC-60169
-----	-----------

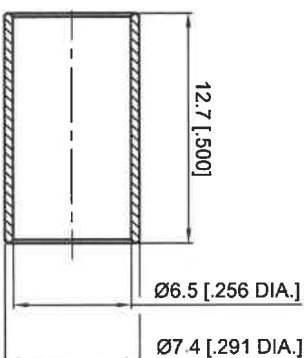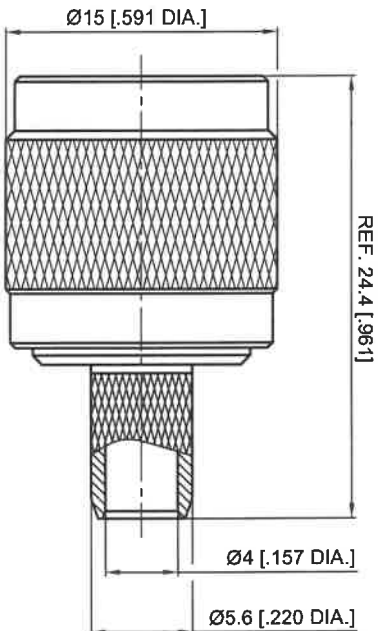

1. CRIMP FERRULE
HEX. CRIMP TOOL SIZE : 6.48 [.255]

Recommended Cable Stripping Dimensions

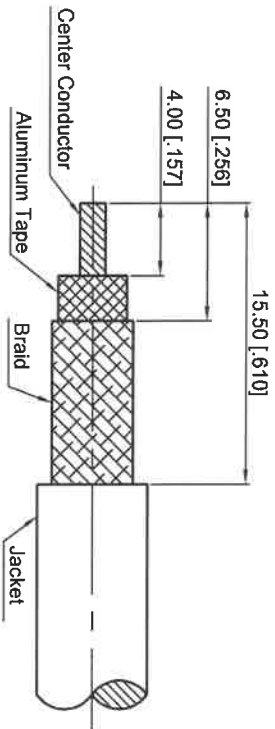

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.