




Single Box **20**

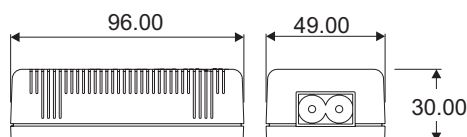

Dati Tecnici / Technical data

Part Number	Input Voltage	Output Voltage	Current	EAN Code
SWD 10 303-60	100-240 Vac	3 Vdc	2200 mA	
SWD 10 305-60	100-240 Vac	5 Vdc	2100 mA	
SWD 10 305-68	100-240 Vac	5 Vdc	2100 mA	
SWD 10 306-60	100-240 Vac	6 Vdc	1600 mA	
SWD 10 307-60	100-240 Vac	7,5 Vdc	1400 mA	
SWD 10 309-60	100-240 Vac	9 Vdc	1200 mA	
SWD 10 312-60	100-240 Vac	12 Vdc	1000 mA	
SWD 10 315-60	100-240 Vac	15 Vdc	700 mA	
SWD 10 318-60	100-240 Vac	18 Vdc	600 mA	
SWD 10 321-60	100-240 Vac	21 Vdc	540 mA	
SWD 10 324-60	100-240 Vac	24 Vdc	450 mA	
SWD 10 330-60	100-240 Vac	30 Vdc	380 mA	

60  ø5,5-2,1 mm  ø5,5-2,5 mm

68  ø5,5-2,1 mm  ø5,5-2,5 mm  ø4,0-1,7 mm

Caratteristiche / Characteristics

Leggero e compatto / Light weight and compact size.
Tensione costante / Constant voltage
Protezione cortocircuito / Short circuit protection.
Applicazioni I.T.E. / Fulfills Information Technology Equipment.

Dati Tecnici / Technical data

Tensione d'Ingresso / Input Voltage: 100-240 V ~ +6-10 % 50 to 60 Hz.
Livello efficienza / Level efficiency: V (EuP2 compatibile/EuP2 compliance)
Tensione d'uscita / Output Voltage: Vedi Modelli / See Models
Tolleranza / Tolerance: ± 5 %
Residuo alternata / Ripple: < 100 mV

Norme / Rules

Sicurezza / Safety: Classe II in accordo a : EN 60950-1
Class II according to: EN 60950-1

Specifiche / EMC specification:

Conforme EN 50081-1-2, EN 50082-1,
EN 55022 classe B., EN 55024
According to EN 50081-1-2, EN 50082-1,
EN 55022 B Class., EN 55024

Immunità / Susceptibility:

In accordo a IEC 61000/ Complies to IEC 61000

Specifiche ambientali / Environmental Specifications

Temp. di Funzionamento / Operating temp.: -10 °C to 30 °C Al massimo carico / at maxim. load.
Temp. Stoccaggio / Storage temp.: -40 °C to 70 °C.
Umidità / Humidity: 10% to 95%.

Specifiche Meccaniche / Mechanical specifications

Peso / Weight : 200 gr.
Imballo / Packing: Cartone / Carton Box: 50 Pezzi / Pcs

Cavo rete incluso / Input cable included

23-008A. Standard



Optional:

23-007/8A: US



23-010/8A: UK

