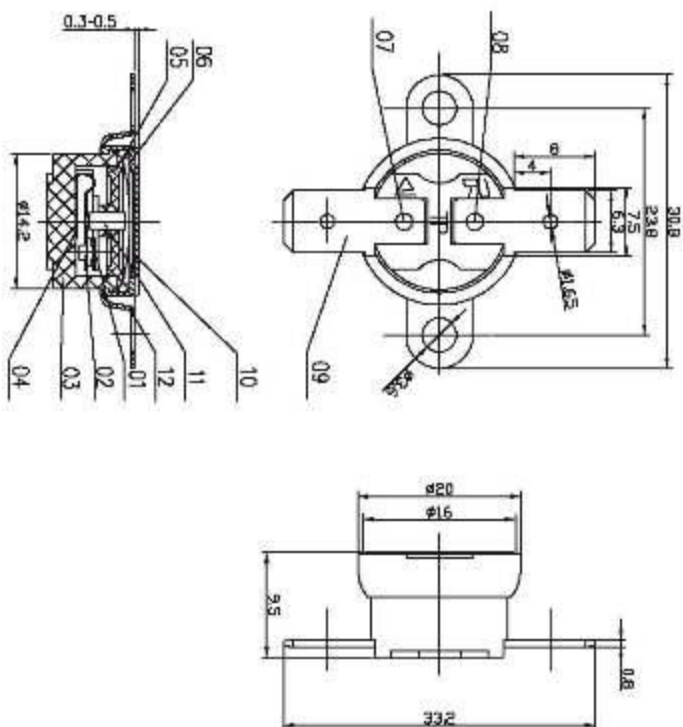







Specification

1. Standards according: CQC:GB14536.1-1998, GB14536.10-1996, JB/T3151-1997, EN60730-1, EN60730-2-9
2. Resistance between terminals: below 50mΩ at DC5V/0.25A (initial figure).
3. Insulated resistance: above 100MΩ(DC500V) at charged and non-charged portion.
4. Dielectric strength: AC1500V for 1 second at charged and non-charged portion
5. Heat resistant: 100°C
6. Obtained standard: CQC, TUV.
7. Packing: 1 Box=400Pcs±2,000pcs. Box size: 470X340X230mm.

5	6	7	8
Type	Off Temp. (°C)	On Temp. (°C)	Contact State
KSD201-50/35/100H	50±3	35±3	(N.C)
KSD201-60/49/100H	60±3	49±3	(N.C)
KSD201-70/39/100H	70±3	59±3	(N.C)
			Dielectric Rating
			ART.NO
			4/604B
			4/604S
			4/6050

Working:

[illegible]

