


Cable Glands

Brass, Sold in packs

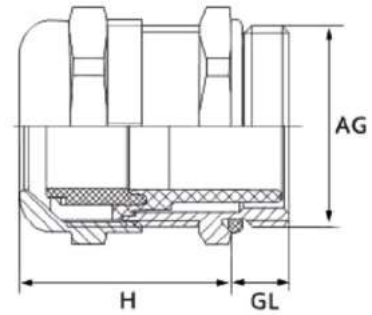

FEATURES:

Includes assembled cable gland (cable gland, grommet, locknut, o-ring) + 1 extra grommet

NBR sealing element

Nylon PA clamp jaw (UL94-V2)

Test standard: EN50262, EN60423

IP 68 protection class (if the wire/cable is in clamping range and O-ring is on the groove)

SPECIFICATION:

Material	Brass, nickel-plated
Protection rating	IP 68
Temperature range	-40...+100 °C

PRODUCT RANGE:

Art. Nr.	Thread	Clamping range	Length	Bore hole ø	GL	AG	H	Spanner size
RND 465-00401	M12 x 1.5	3...6.5 mm	23 mm	12.3 mm	5 mm	12 mm	18 mm	14 mm
RND 465-00402	M16 x 1.5	4...8 mm	26 mm	16.3 mm	6 mm	16 mm	20 mm	17 mm
RND 465-00403	M20 x 1.5	6...12 mm	28.5 mm	20.3 mm	6.5 mm	20 mm	22 mm	22 mm
RND 465-00404	M25 x 1.5	11...16 mm	32 mm	25.3 mm	7 mm	25 mm	25 mm	27 mm
RND 465-00405	PG7	3...6.5 mm	23 mm	12.8 mm	5 mm	12.5 mm	18 mm	14 mm
RND 465-00406	PG9	4...8 mm	26 mm	15.5 mm	6 mm	15.2 mm	20 mm	17 mm
RND 465-00407	PG11	5...10 mm	27 mm	18.9 mm	6.5 mm	18.6 mm	21 mm	20 mm