



Part No.:Hi-05D3YGDCE-218

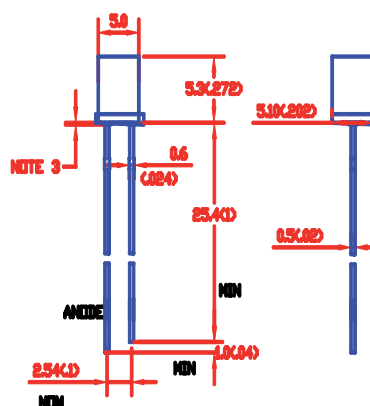
19/04270-00

§ Standard 5mm diameter package.

Characters

§ High intensity.

ITEM		MATERIALS
Resin(Mold)		Epoxy
Lens Color Code	C	Water Transparent
	T	Colored Transparent
	D	White Diffused
	E	Colored Diffused
Lead Frame		Ag Plating Iron Alloy
Dice		GaInP

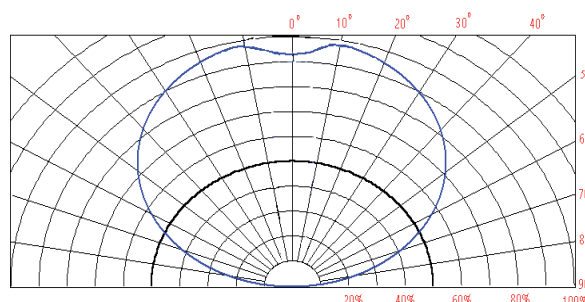
Outline Dimensions

§ All dimensions are in millimeters (inches) .

§ Tolerance is ± 0.25 (.010)mm unless otherwise noted.**Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)**

Item	Symbol	Value	Unit
Power Dissipation	PD	100	mW
DC Forward Current	IF	30	mA
Pulsed Forward Current	IFP	100	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-25 ~ +80	$^\circ\text{C}$
Storage Temperature	Tstg	-40 ~ +100	$^\circ\text{C}$
Soldering Temperature	Tsol	260for5sec	$^\circ\text{C}$

* Duty 1/10 Pulse Width 0.1ms ▲ At the position of 4mm from the bottom of the package

Directive Characteristics ($T_a=25^\circ\text{C}$)**Electrical-Optical Characteristics ($T_a=25^\circ\text{C}$)**

Parameter	Symbol	Value			Unit	Test condition
		Min.	Typ.	Max.		
Forward Voltage	Vf	---	2.1	2.4	V	If=20mA
Luminous intensity	Iv	8	15	30	mcd	If=20mA
Wavelength	X(λd)	---	565	570	(nm)	If=20mA
	y	---	---	---	---	If=20mA
Reverse Current	Ir	---	---	5	μA	Vr=5V
Viewing angle	2θ1/2	---	140	---	Deg	If=20mA
Spectral half bandwidth	Δλ	---	25	---	nm	If=20mA