



Part No. : Hi-25N3DRT-163W4

19/04800-00


§ Standard 2*5*7mm diameter package.

Characters

§ High intensity.

ITEM	MATERIALS	
Resin(Mold)	Epoxy	
Lens Color Code	C	Water Transparent
	T	Colored Transparent
	D	White Diffused
	E	Colored Diffused
Lead Frame	Ag Plating Iron Alloy	
Dice	InGaN	

Outline Dimensions

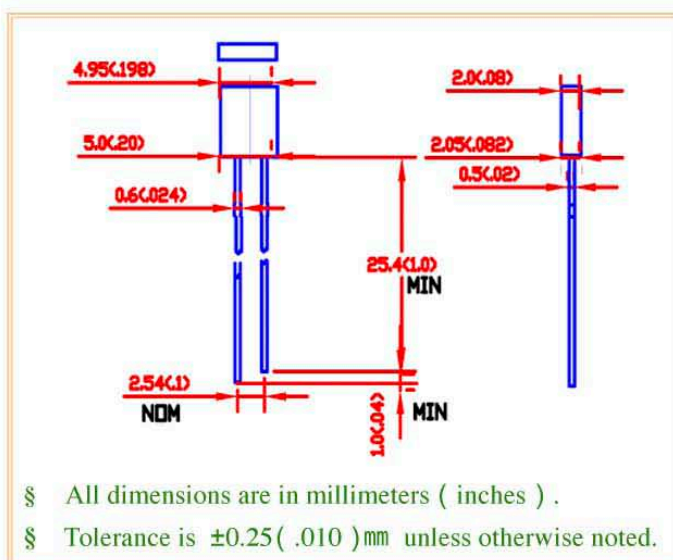


Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Value	Unit
Power Dissipation	PD	100	mW
DC Forward Current	IF	30	mA
Pulsed Forward Current	IFP	100*	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-25 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	260for5sec ^Δ	°C

* Duty 1/10 Pulse Width 0.1ms Δ At the position of 4mm from the bottom of the package

Directive Characteristics (Ta=25°C)

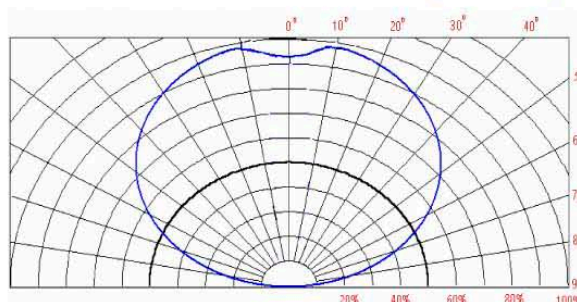

Electrical-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Value			Unit	Test condition
		Min.	Typ.	Max.		
Forward Voltage	Vf	---	2.0	2.2	V	If=20mA
Luminous intensity	Iv	30	---	50	mcd	If=20mA
Wavelength	X(λd)	---	620	630	(nm)	If=20mA
	y	---	---	---	---	If=20mA
Reverse Current	Ir	---	---	5	μA	Vr=5V
Viewing angle	2θ1/2	---	140	---	Deg	If=20mA
Spectral half bandwidth	Δλ	---	25	---	nm	If=20mA