

Part No. : Hi-25N4SYDBE-186

19/04810-00


§ Standard 2*5*7mm diameter package.

Characters

§ High intensity.

ITEM		MATERIALS
Resin(Mold)		Epoxy
Lens Color Code	C	Water Transparent
	T	Colored Transparent
	D	White Diffused
	E	Colored Diffused
Lead Frame		Ag Plating Iron Alloy
Dice		InGaN

Outline Dimensions

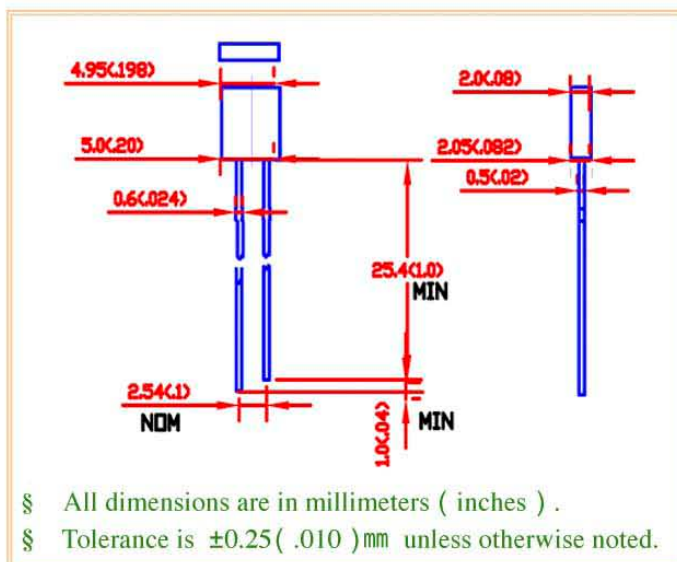


Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Item	Symbol	Value	Unit
Power Dissipation	PD	100	mW
DC Forward Current	IF	30	mA
Pulsed Forward Current	IFP	100*	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-25 ~ +80	$^\circ\text{C}$
Storage Temperature	Tstg	-40 ~ +100	$^\circ\text{C}$
Soldering Temperature	Tsol	260for5sec Δ	$^\circ\text{C}$

* Duty 1/10 Pulse Width 0.1ms Δ At the position of 4mm from the bottom of the package

Directive Characteristics ($T_a=25^\circ\text{C}$)

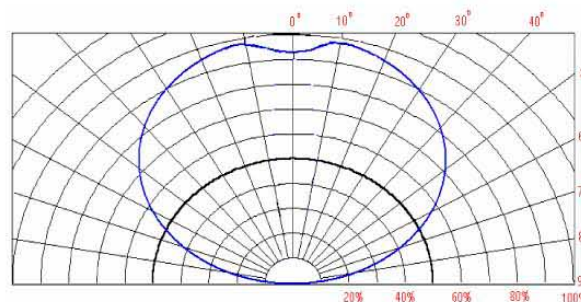

Electrical-Optical Characteristics ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Value			Unit	Test condition
		Min.	Typ.	Max.		
Forward Voltage	Vf	---	1.8	2.4	V	If=20mA
Luminous intensity	Iv	---	10	20	med	If=20mA
Wavelength	X(&Ad)	---	585	590	(nm)	If=20mA
	y	---	---	---	---	If=20mA
Reverse Current	Ir	---	---	5	μA	Vr=5V
Viewing angle	2 θ 1/2	---	140	---	Deg	If=20mA
Spectral half bandwidth	$\Delta\lambda$	---	25	---	nm	If=20mA